Star-8 Monitoring Unit Interconnection Quick Start Diagram

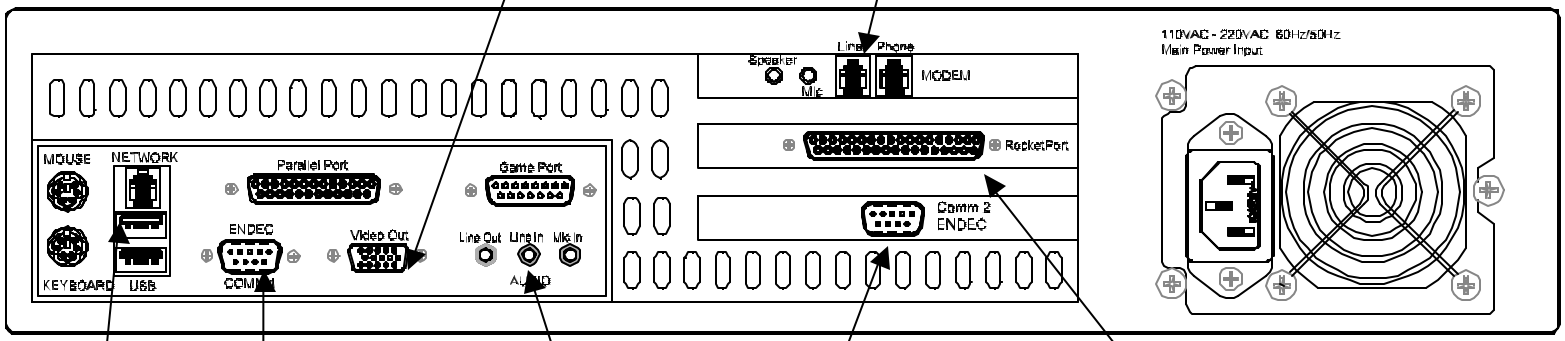

Video Out to Computer Monitor

Modem Connection for Use with PCAnywhere©

ENDEC Connection: From ENDEC COM 3, set ENDEC COM 3 Device to VDS-MC

ENDEC Connection: From ENDEC COM 6, set ENDEC COM 6 Device to VDS-MCSA

RocketPort Card: Connect supplied "Octopus" cable here—Connect P0 to Star-8 Bank 1, P1 to Bank 2, P2 to Bank 3, etc…

Network Connection to SA App Server: Default Factory Setting IP is 10.0.0.13

Audio input from ENDEC: Use 3.5mm plug into StarMU: Connect to Speaker Line Out and Audio Common on ENDEC (If 3 wire plug, connect black and red wires together to Speaker Line Out on ENDEC)

Note that the ENDEC connects to the StarMU with a supplied Null Modem Cable only. Other cables will not make proper link. ENDEC can connect to either Comm 1 and/or Comm 2. The default factory setting is Comm 1 to connect to ENDEC COM 3 (Analog for Star-8 Channels), and Comm 2 to connect to ENDEC COM 6 (Digital for Scientific Atlanta™ App Server System)